




BDK 22 5j Beacon

A 5j beacon approved for use in Zone 22 dust environments. Giving clear signals the IP54 rating allow for both internal and external use.

ATEX

Technical Specification

Voltage	24Vdc 230Vac
Current	300mA @ 24V 70mA@ 230Vac (50Hz)
Flash rate	1Hz
Flash power	5j
Flash colour	Red, amber
Temperature	-20°C to +50°C
Protection	IP54
Construction	Lens - polycarbonate base - seawater proof coated aluminium
Weight	0.7Kg
Colours	Base - grey

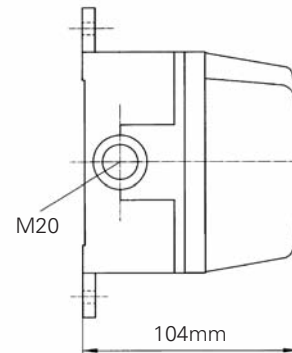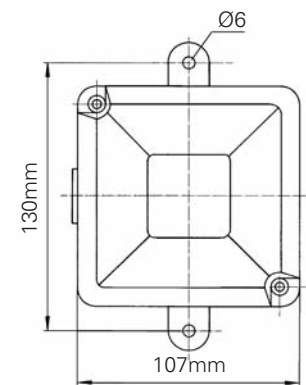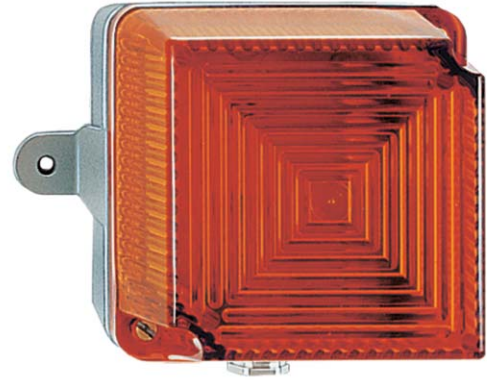

Features

- For use in Zone 22 areas
- 5j flash
- IP54 protection
- Corrosion resistant

Benefits

- Specially approved for use in hazardous dust environments
- Bright beacon for general signalling
- Can be used internally or externally
- Low maintenance

Reference

BDK22/5J/X/RL/24VDC

Catalogue No.

22481402

Description

ExII-Zone 22 Strobe Light BDK22, 24Vdc, Aluminium Cast Housing, Red Lens

BDK22/5J/X/RL/230VAC

22471202

ExII-Zone 22 Strobe Light BDK22, 230Vac, Aluminium Cast Housing, Red Lens

BDK22/5J/X/RL/230VAC

22471203

ExII-Zone 22 Strobe Light BDK22, 230Vac, Aluminium Cast Housing, Amber Lens