

UL & FM Approved

MB Motorised Bell



A rugged 6" motorised bell with fixings to suit standard US wiring accessories. It may be used in exterior applications when fitted to a WBB weather resistant back box.

Features

- UL/FM approvals
- 6" or 10" gong
- Semi flush or surface mounting
- Motorised operation


Benefits

- Can be used in all territories recognising UL standards
- Gong sizes provide different frequencies that stand out from ambient noise
- Flexible installation options using standard US wiring boxes or Wheelock's own surface back boxes
- Efficient reliable operation

Technical Specification

Voltage	16 - 33Vdc
Current	30mA
Sound Output	92dB(A) @ 10ft
Monitoring	Reverse polarity
Temperature	0°C to + 49°C - 35°C to + 66°C (with WBB back box)
Protection	Interior use Exterior use with WBB backbox
Weight	0.83Kg (2 lbs)
Colour	Red or grey

Dimensions

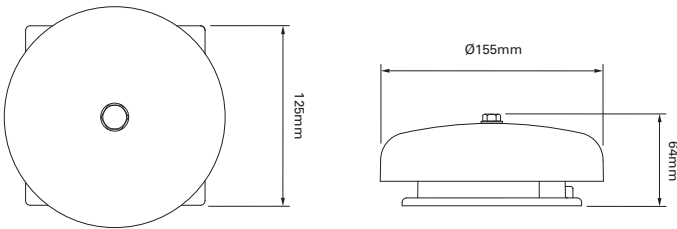

Motorised Bell Grey



Catalogue Numbers

Reference	Cat No	Description
MB-G6-24-R	CN103941	MB Motor Bell, Red Body, 6in
MB-G6-24-S	CN104222	MB Motor Bell, Grey Body, 6in