

# Sounder Beacons

Squashni LX Base



The unique Squashni LX Base ceiling device refracts light around a smoke or heat detector to provide the required illumination demanded by EN 54-23.

Delivering a coverage volume radius of 15m, and a square area of 10.6m, the product is designed in line with the spacing specifications for both smoke and heat detectors.

The Squashni's universal fitting means almost all detectors can be incorporated directly into the unit.

Approval pending


## Features

- Up to 15m coverage
- Can be fitted with any standard detector
- LED technology
- White Flash

## Benefits

- Ideal for large public areas
- Saves on installation costs
- Flash Rate Switch improves energy efficiency
- Flexibility in system design

## Dimensions

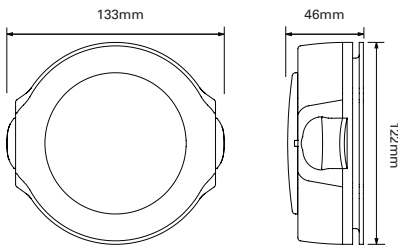

## Technical Specification

<b>Mounting type</b>	Ceiling
<b>Voltage</b>	16 - 28VDC (Fire Use) 9-15VDC (Fire Use) 9 - 28VDC (Non Fire Use)
<b>Current:</b>	65 - 130mA dependent on setting
<b>Coverage (y)</b>	15m (switchable to 5m)
<b>Mounting Height (x)</b>	3m (max)
<b>Coverage Volume Code</b>	C-3-15
<b>Coverage Volume</b>	530m <sup>3</sup> (58m <sup>3</sup> )
<b>Flash Rate</b>	1Hz (Switchable to 0.5Hz)
<b>Temperature</b>	-10°C to +55°C
<b>Monitoring</b>	Reverse Polarity
<b>Protection</b>	IP21C
<b>Weight</b>	200g
<b>Body Color</b>	White or Red
<b>Flash Colour</b>	White
<b>Sound Output</b>	90dB(A) (Typical tone 3)

## Catalogue Numbers

Reference	Cat No	Description
See website for more information		